


UVCOB64-2525-385-60-001



UVCOB64-2525-385-60-001

385nm HIGH POWER LED

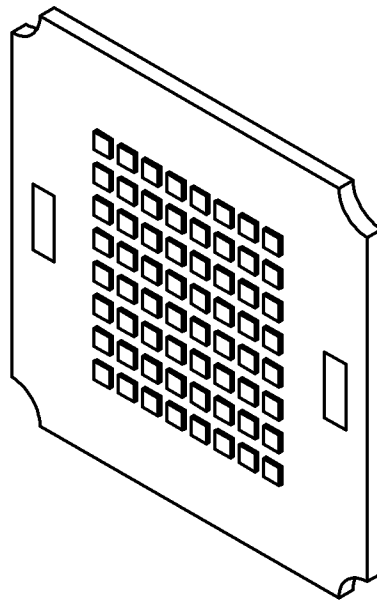

Size

W25×D25×H2 mm

UVCOB64-2525-385-60-001

Maximum Ratings (Tc=25°C)

Parameter	Symbol	Values	Unit
Power Dissipation	P _D	264	W
Forward Current	I _F	8	A
Reverse Voltage	V _R	5	V
Junction Temperature	T _j	115	°C
Operating Temperature ※	T _{opr}	-40~85	°C
Storage Temperature ※	T _{stg}	-20~65	°C





※No condensation

Optical and Electrical Characteristics (Tc=25°C)


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Forward Voltage	V _F		28	33	V	I _F =8A
Radiated Power	P _O		88		W	I _F =8A
Peak Wavelength	λ _P		385		nm	I _F =8A
Half Width	Δλ		15		nm	I _F =8A
Viewing Half Angle	θ 1/2		±60		deg	I _F =8A

※Radiated Power is measured by MCPD-9800.

Typical Characteristic Curves

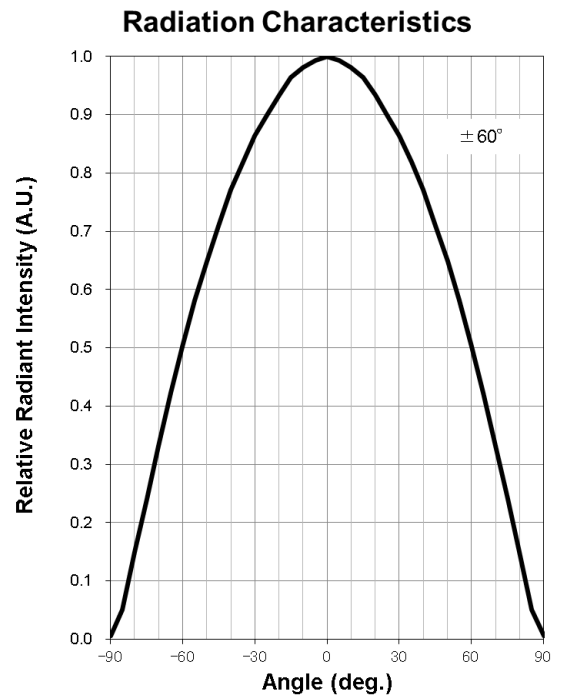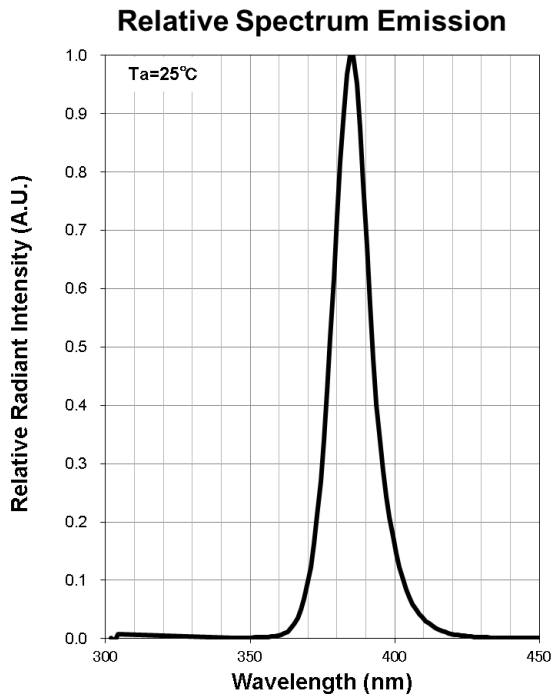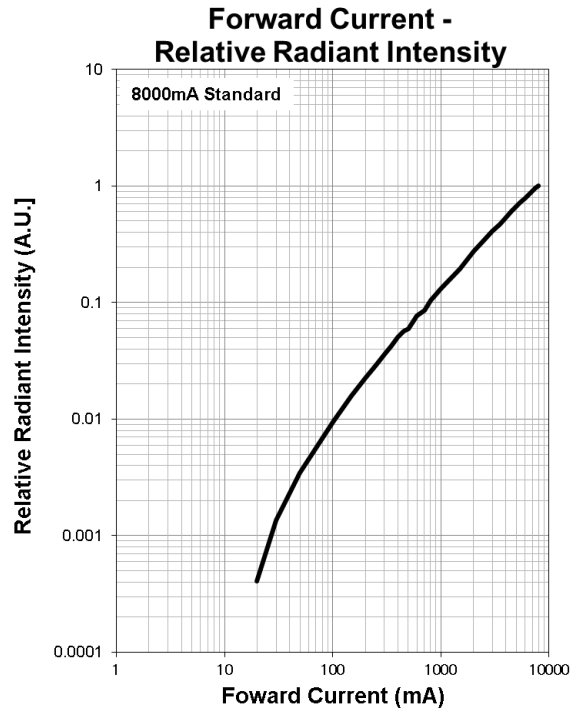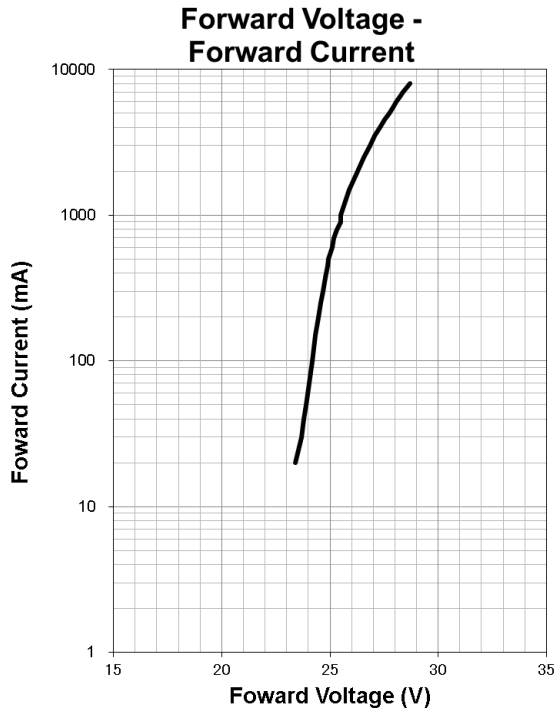

Outline

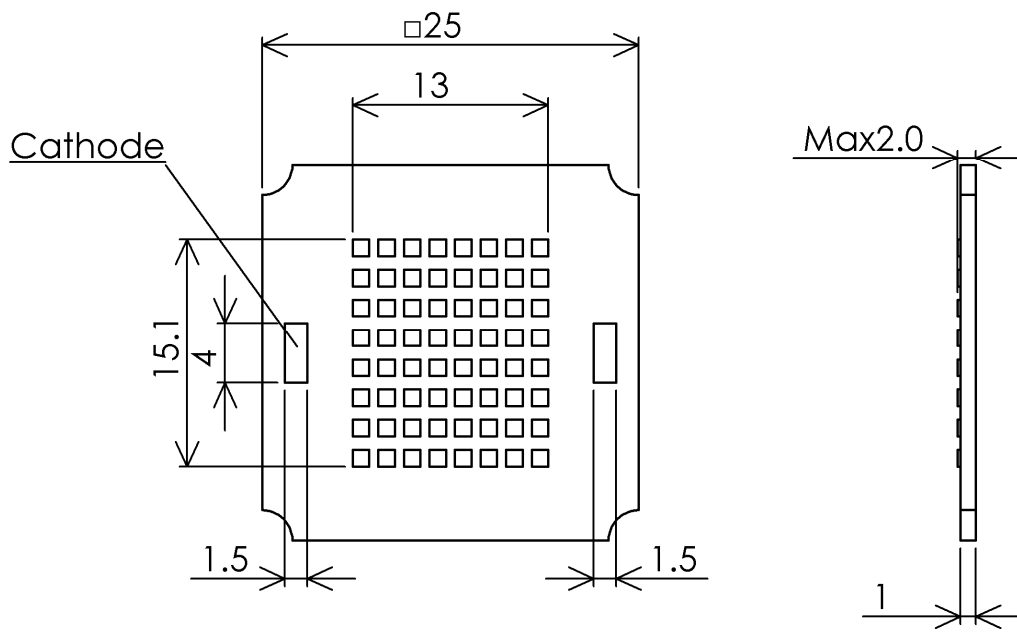

Unit : mm