


UVCOB64-2525-395-60-001



UVCOB64-2525-395-60-001

395nm HIGH POWER LED

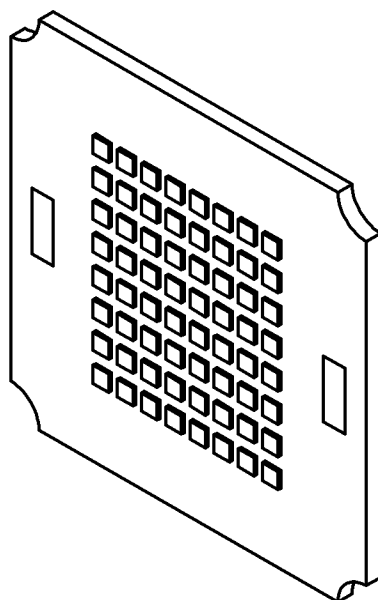

Size

W25×D25×H2 mm

UVCOB64-2525-395-60-001

Maximum Ratings (Tc=25°C)

Parameter	Symbol	Values	Unit
Power Dissipation	P_D	264	W
Forward Current	I_F	8	A
Reverse Voltage	V_R	5	V
Junction Temperature	T_j	115	°C
Operating Temperature ※	T_{opr}	-40~85	°C
Storage Temperature ※	T_{stg}	-20~65	°C





※No condensation

Optical and Electrical Characteristics (Tc=25°C)


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Forward Voltage	V_F		28	33	V	$I_F=8A$
Radiated Power	P_O		88		W	$I_F=8A$
Peak Wavelength	λ_P		397		nm	$I_F=8A$
Half Width	$\Delta \lambda$		15		nm	$I_F=8A$
Viewing Half Angle	$\theta_{1/2}$		± 60		deg	$I_F=8A$

※Radiated Power is measured by MCPD-9800.

Typical Characteristic Curves

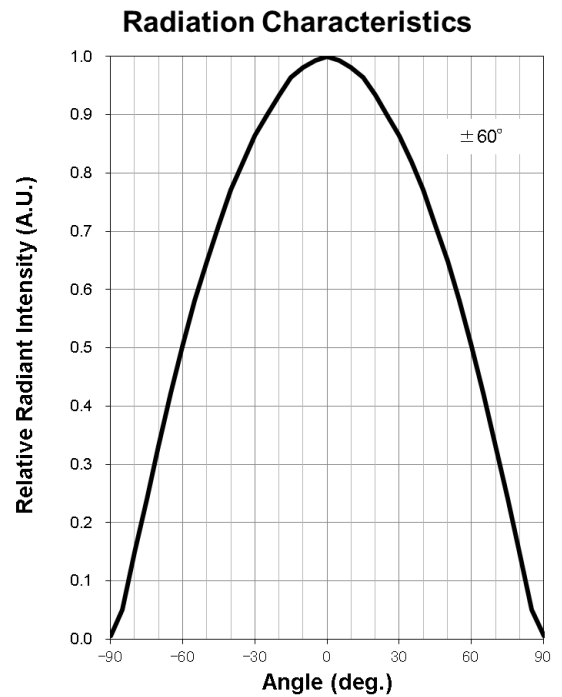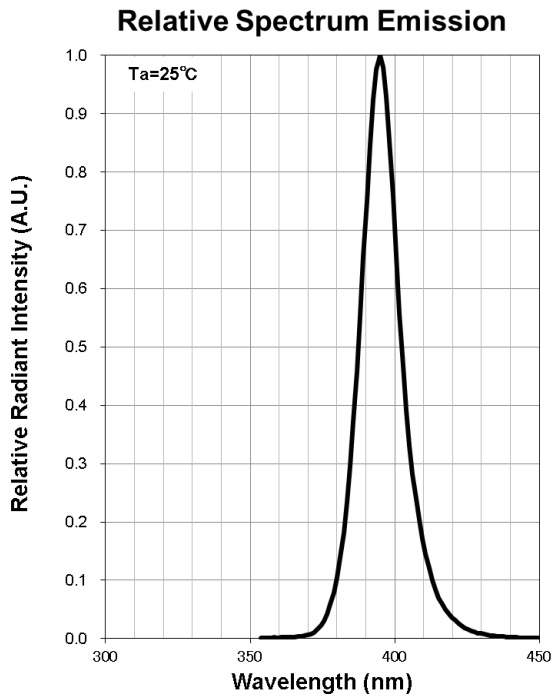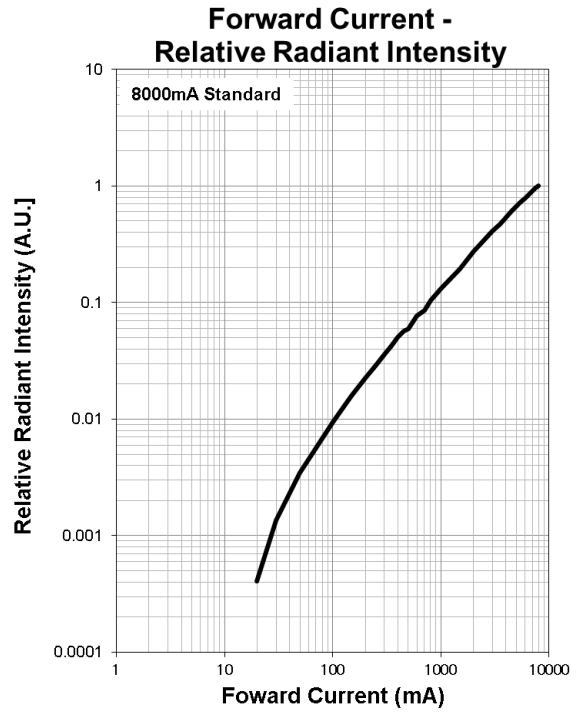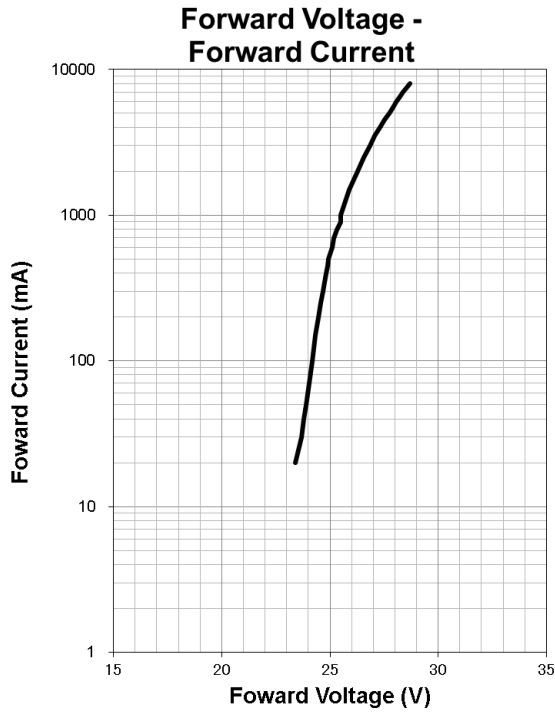

Outline

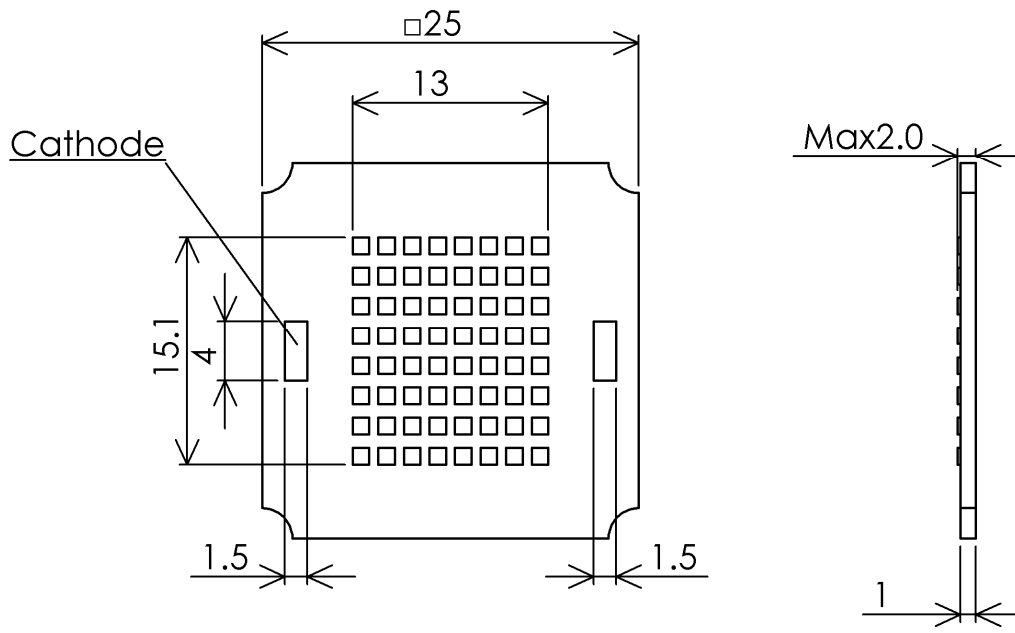

Unit : mm